Photovoltaic housing with connection terminals, unequipped



Type 2 | LPZ 1→2 | Type 1+2 | LPZ 0→1


System solution for photovoltaic inverter with 3 separate MPP trackers, unequipped

- Varistor arrestor, connectable with cut-off unit in error-resistant Y circuit to VDE 0100-712 (50539-12)
- 5088609: Two PV string inputs (MC4 plug connector) at an MPP inverter input, IN up to 15 A DC per MC4 connector
- 5088573: Per protection device there are 6 terminals up to 6 mm² pre-mounted in the housing, IN up to 30 A DC per terminal
- Unequipped, order covers separately
- Pre-mounted in polycarbonate housing (IP65), UV-resistant for use outside, including cable gland kit


For DC protection of the inverter in photovoltaic systems.
If there is a danger of condensation forming through wind, ice, temperature or sunlight, further measures may be necessary!

Type	U max DC V	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
VG-BCPV U K 333	1000	–	1	478,000	**5088573**

Dimensions

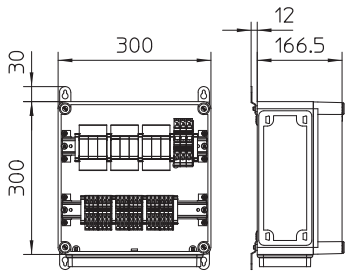

Connection options



VG-BCPV U K 333

U max DC V	U_e DC	1000
Connection cross-section rigid mm²		0,5-10
Connection cross-section, flexible mm²		0,5-6
Temperature range °C	ϑ	-40-80
Protection rating		IP65