



PV system solution, type 1+2, for inverter with 2 MPP trackers, 900 V DC

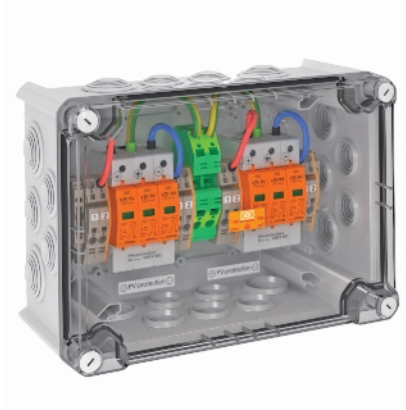


Type	Highest continuous voltage AC	Pole version	Protection rating	Pack. pcs	Weight kg/100 pcs.	Item No.
VG-BCPV900K 22	—	—	IP66	1	220,000	5088566

Dimensions

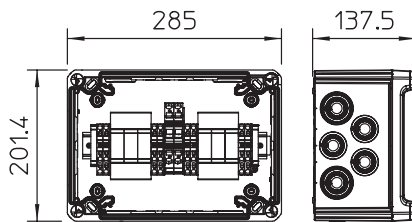

Connection options



VG-BCPV900K 22

U max DC V	U _c DC	900
SPD to EN 61643-11		Type 1+2
Lightning protection zone LPZ		0→2
Impulse discharge current (10/350) kA	I _{imp}	7
Nominal discharge current (8/20) kA	I _n	30
Maximum discharge current (8/20 μs) kA	I _{max}	60
Voltage protection level kV	U _p	< 3,0
Response time ns	t _A	< 25
Temperature range °C	ϑ	-30-90
Protection rating		IP66