


PV housing for inverter with 3 MPP trackers, type 1+2, 900 V DC

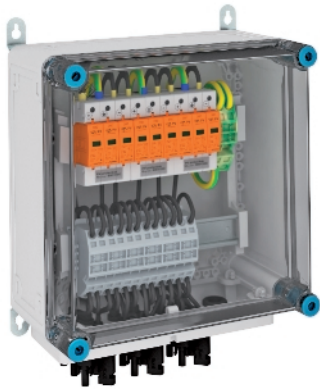


System solution with MC4 connector for photovoltaic inverter with 3 separate MPP trackers

- Varistor arrester, connectable with cut-off unit in error-resistant Y circuit to VDE 0100-712 (50539-12)
- Low DC protection level: < 4.0 kV (Voc max = 1000 V DC with V20-C/0-500PV)
- Low DC protection level: < 3.0 kV (Voc max = 900 V DC with V25-B+C/0-450PV)
- Two PV string inputs (MC4 plug connector) at one MPP inverter input, up to 30 A DC per terminal
- Pre-mounted in polycarbonate housing (IP65), UV-resistant for use outside, including cable gland kit

For DC protection of the inverter in photovoltaic systems.


If there is a danger of condensation forming through wind, ice, temperature or sunlight, further measures may be necessary!

Dimensions



Type	U max DC V	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
VG-BC DCPH900-31	900	For three MPP and with MC4 connection	1	542,000	5088629

Connection options



VG-BC DCPH900-31

U max DC V	Uc DC	900
SPD to EN 61643-11		Type 1+2
Lightning protection zone LPZ		0→2
Impulse discharge current (10/350) kA	I _{imp}	7
Nominal discharge current (8/20) kA	I _n	30
Maximum discharge current (8/20 μs) kA	I _{max}	60
Voltage protection level kV	U _p	< 3,0
Response time ns	t _A	< 25
Temperature range °C	θ	-40-80
Protection rating		IP65