

### Medium and fine protection for two-core systems 60 V



Surge protection for use in measurement and control technology




- Medium and fine protection
- Standard design for single core systems
- Two-stage protection circuit
- With installation-friendly, screwless connection terminals
- In space-saving 17.5 mm grid
- With inductive decoupling in the longitudinal branch


Application: Universal use on any 35 mm DIN profile rail in every commercially available distributor housing.

Type	Highest continuous voltage AC V	Highest continuous voltage DC V	Number of poles	Connection system	Pack. pcs	Weight kg/100 pcs.	Item No.
FLD 60	65	93	2	Terminal	1	5,200	5098638

#### Dimensions



#### Connection options

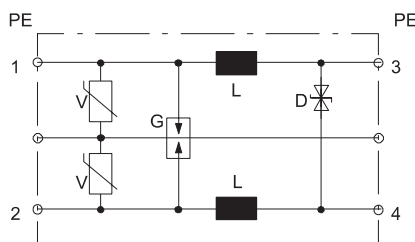

#### FLD 60

Maximum continuous voltage AC V	U <sub>c</sub>	65
Maximum continuous voltage DC V	U <sub>c</sub>	93
Category		Type 1+2+3 / D1+C2+C1
Lightning protection zone LPZ		0→3
Number of poles		2
Rated current A	I <sub>n</sub>	1
Series inductivity per wire		120 μH ± 20 %
Impulse durability wire-wire		C1: 1 kV / 0.5 kA (8/20μs)
Impulse durability wire-earth		C2: 10 kV / 5 kA (8/20μs)
Total discharge current (8/20) kA		10
Total discharge current (10/350) kA		D1: 3
Protection level wire-wire V		<160
Protection level wire-earth V		<600
Temperature range °C	θ	-40+80
Installation type		DIN rail 35 mm
Connection system		Terminal
Division unit TE (17.5 mm)		1
Protection rating		IP20
Connection cross-section, flexible mm <sup>2</sup>		0,14-2,5
Connection cross-section, multi-wire mm <sup>2</sup>		0,14-2,5
Connection cross-section rigid mm <sup>2</sup>		0,14-2,5
Earthing via:		Terminal
Testing standard		IEC 61643-21
Approvals		—