

Combination arrester V50, 3-pole + NPE 280 V



Lightning current combination arrester, type 1+2 to DIN EN 61643-11




- For lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)
- Complete unit, pre-mounted and ready for connection in polycarbonate housing (IP66)
- Lightning current arresting capacity 12.5 kA (10/350) per pole and up to 50 kA (10/350) in total


Application: Lightning protection equipotential bonding for buildings of Class III and IV. If there is a danger of condensation forming through wind, ice, temperature or sunlight, further measures may be necessary!

Type	Highest continuous voltage AC V	Pole version	Pack. pcs	Weight kg/100 pcs.	Item No.
VG-V50-3+NPE-280	280	3+N/PE	1	110,000	5093596

Dimensions

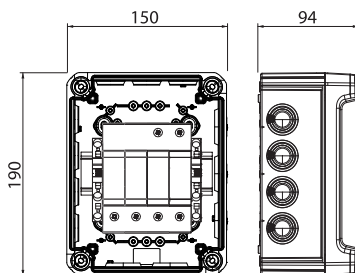

Connection options



VG-V50-3+NPE-280

SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-11	Class I+II
SPD to UL 1449	Type 4
Nominal voltage AC (50 / 60 Hz) V	U_n 230
Maximum continuous voltage AC V	U_c 280
Nominal discharge current (8/20 μ s) kA	$I_{n/L-N}$ 30
Maximum discharge current (8/20 μ s) kA	I_{max} 50
Lightning surge current (10/350 μ s) kA	I_{imp} 12,5
Total discharge current (10/350) kA	I_{total} 50
Arrester surge current (8/20 μ s) [total] kA	I_{total} 50
Protection level [L-N] kV	U_p 1,3
Residual voltage [L-N] @ 1 kA kV	U_{res} 1
Residual voltage [L-N] @ 5 kA kV	U_{res} 1
Max. mains-side overcurrent protection	160 A gL/gG
Short-circuit withstand for max. mains-side overcurrent protection	50 kA eff
Operating temperature range °C	T_u -40-80
Protection rating	IP66
Approvals	UL
Cable cross-section, flexible (fine-wire) mm ²	1,5-35
Rigid cable cross-section (single wire/multiwire) mm ²	1,5-35
Cable cross-section, flexible (fine-wire) AWG	16-2
Rigid cable cross-section (single wire/multiwire) AWG	16-2