

Fine power protection, protective contact sockets




Surge protection / fine power protection, type 3, to EN 61643-11 for protective contact sockets.

- Thermal cut-off unit with acoustic defect signalling
- Y protection circuit for increased safety
- Mounting through snapping onto the support ring of the socket
- Labelling of the socket with supplied sign


Application: For retrofitting on standard Schuko sockets.

Type	Signalling on device	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
ÜSM-ST-230-1P+PE	Audible	Acoustic function display	1	1,770	5092441

Dimensions



Connection options

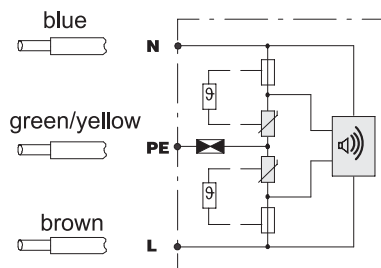

ÜSM-ST-230-1P+PE

Nominal voltage V	U_N	230
Max. continuous operating voltage V	U_C	255
SPD to EN 61643-11		Type 3
SPD to IEC 61643-11		Class III
Lightning protection zone LPZ		2→3
Nominal discharge current (8/20) kA	I_n	3
Maximum discharge current (8/20 μ s) kA	I_{max}	5
Protection level (L-N) kV		< 1,5
Protection level (N-PE) kV		< 1,5
Maximum back-up fuse A		16
Response time ns	t_A	25
Temperature range °C	θ	-5-40